

Quilt Assembly


-For the solid blocks:

-From **Fabric 4**, cut **(5)** 6 ½" squares.


-For the borders:

-From **Fabric 4**, cut **(5)** 3 ½" x WOF strips. Sew the strip short ends together. From the long strip, cut **(2)** 3 ½" x 48 ½" strips and **(2)** 3 ½" x 54 ½" strips.

-Lay out the following seven blocks as shown, rotating blocks as needed. Stitch together, nesting seams where possible. Press seams in the direction of the arrow.

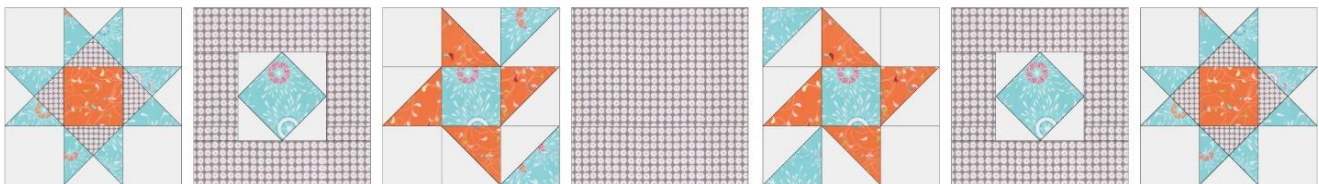

-Lay out the following seven blocks as shown, rotating blocks as needed. Stitch together, nesting seams where possible. Repeat to make a matching row. Press the seams in one row all to the right and the seams in the matching row all to the left.

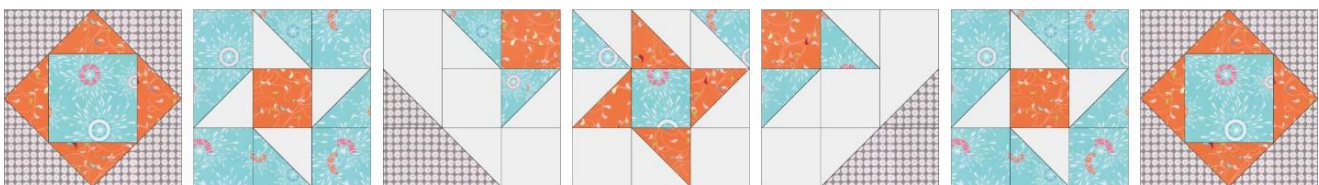

-Lay out the following seven blocks as shown, rotating blocks as needed. Stitch together, nesting seams where possible. Repeat to make a matching row. Press the seams in one row all to the right and the seams in the matching row all to the left.



-Lay out the following seven blocks as shown, rotating blocks as needed. Stitch together, nesting seams where possible. Press seams in the direction of the arrow. Repeat to make a matching row.



-Lay out the following seven blocks as shown, rotating blocks as needed. Stitch together, nesting seams where possible. Repeat to make a matching row. Press the seams in one row all to the right and the seams in the matching row all to the left.



-Following the assembly diagram, lay out the nine rows as shown, rotating rows as needed and then stitch together. Sew a **Fabric 4** 3 ½" x 54 ½" border strip to each side of the quilt. Press towards **Fabric 4**. Sew a **Fabric 4** 3 ½" x 48 ½" border strip to the top and bottom of the quilt. Press towards **Fabric 4**.

-Layer the quilt top with batting and backing fabric and quilt as desired.

Assembly Diagram

